





- g Tested
- Pb-free Lead Plating
 - Halogen-free and RoHS-compliant

D (O N)_ ion] 65 S	9Value
650	V
3.5	V
17.4	A
169	m
5.2	J

E_{oss}@400V

DFN8080-4L	4	H65R190A	1	-55 to 150	13-inch Reel	3000
------------	---	----------	---	------------	--------------	------

V _{DS}	V
V _{GS}	V
I _{DM}	A
I _{AS}	A
E _{AS}	mJ
T _J	

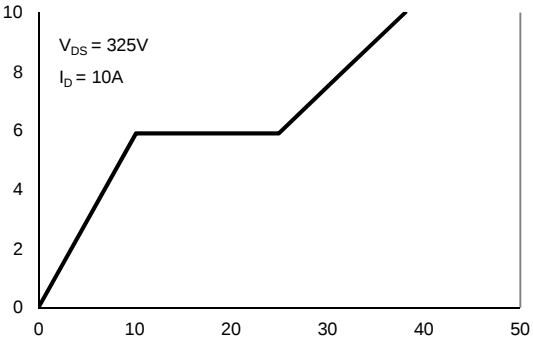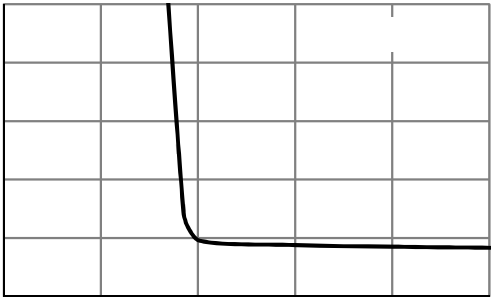



Gate Threshold Voltage	$V_{(BR)DSS}$	650			V
	I_{DSS}	$V_{DS} = 650V, V_{GS} = 0V$		1.0	
	I_{GSS}			± 100	nA
	$V_{GS(th)}$	2.5	3.5	4.5	V
	$R_{DS(ON)}$		169	190	m
	V_{SD}		0.75	1.0	V
	I_S			156	A



C_{ISS}	1560	pF
C_{OSS}		







