



Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics						
$V_{(BR)DSS}$	Drain-Source Breakdown Voltage	$I_D = 250\text{ A}, V_{GS} = 0\text{V}$	40	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{DS} = 32\text{V}, V_{GS} = 0\text{V}$	-	-	1.0	A
I_{GSS}	Gate-Body Leakage Current	$V_{DS} = 0\text{V}, V_{GS} = \pm 20\text{V}$	-	-	± 100	nA
On Characteristics						
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}, I_D = 250\text{ A}$	2.0	2.8	3.7	V
$R_{DS(ON)}$	Static Drain-Source ON-Resistance ⁽⁴⁾	$V_{GS} = 10\text{V}, I_D = 20\text{A}$	-	2.8	3.7	m
Dynamic Characteristics						
R_g	Gate Resistance	$f = 1\text{MHz}$	-	0.7	-	
C_{iss}	Input Capacitance	$V_{GS} = 0\text{V}, V_{DS} = 20\text{V}, f = 1\text{MHz}$	1398	1958	2643	pF
C_{oss}	Output Capacitance		890	1246	1682	pF
C_{riss}	Reverse Transfer Capacitance		65	91	123	pF
Q_g	Total Gate Charge	$V_{GS} = 0\text{ to }10\text{V}$ $V_{DS} = 20\text{V}, I_D = 20\text{A}$	22	30	41	nC
Q_{gs}	Gate Source Charge		-	10	-	nC
Q_{gd}	Gate Drain("Miller") Charge		-	8	-	nC
Switching Characteristics						
$t_{d(on)}$	Turn-On DelayTime	$V_{GS} = 10\text{V}, V_{DD} = 20\text{V}$ $I_D = 20\text{A}, R_{GEN} = 3$	-	13	-	ns
t_r	Turn-On Rise Time		-	28	-	ns
$t_{d(off)}$	Turn-Off DelayTime		-	21	-	ns
t_f	Turn-Off Fall Time		-	8	-	ns
Body Diode Characteristics						
I_S	Maximum Continuous Body Diode Forward Current		-	-	137	A
I_{SM}	Maximum Pulsed Body Diode Forward Current		-	-	550	A
V_{SD}	Body Diode Forward Voltage	$V_{GS} = 0\text{V}, I_S = 20\text{A}$	-		1.2	V
t_{rr}	Body Diode Reverse Recovery Time	$I_F = 20\text{A}, di/dt = 100\text{A/us}$	27	38	52	ns
Q_{rr}	Body Diode Reverse Recovery Charge		-	35	-	nC


- Notes:
1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature.
 2. E_{AS} condition: Starting $T_J = 25^\circ\text{C}$, $V_{DD} = 20\text{V}$, $V_{GS} = 10\text{V}$, $R_G = 25\text{ohm}$, $L = 3\text{mH}$, $I_{AS} = 11.9\text{A}$, $V_{DD} = 0\text{V}$ during time in avalanche.
 3. R_{JA} is measured with the device mounted on a 1inch^2 pad of 2oz copper FR4 PCB.
 4. Pulse Test: Pulse Width $300\mu\text{s}$, Duty Cycle 0.5% .

Typical Performance Characteristics

Figure 1: Power De-rating

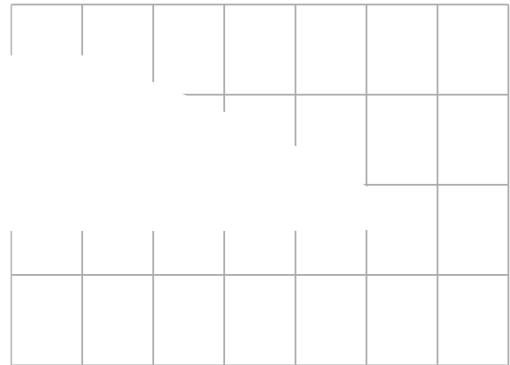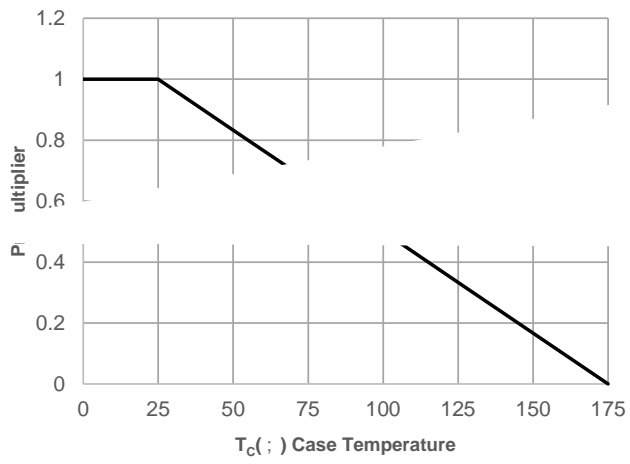

Typical Performance Characteristics

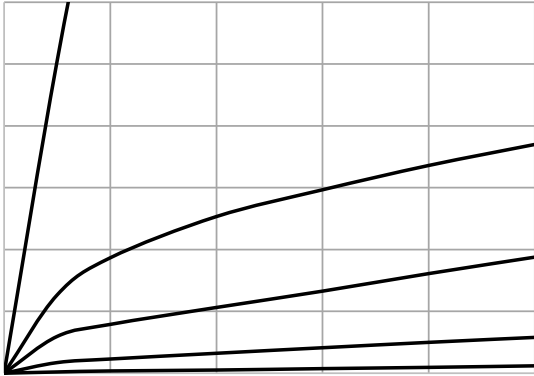

Test Circuit



Figure 1: Gate Charge Test Circuit & Waveform

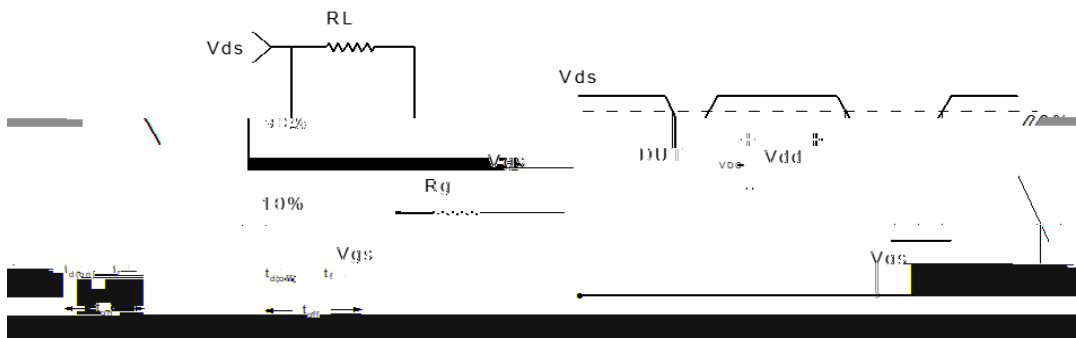


Figure 2: Resistive Switching Test Circuit & Waveform

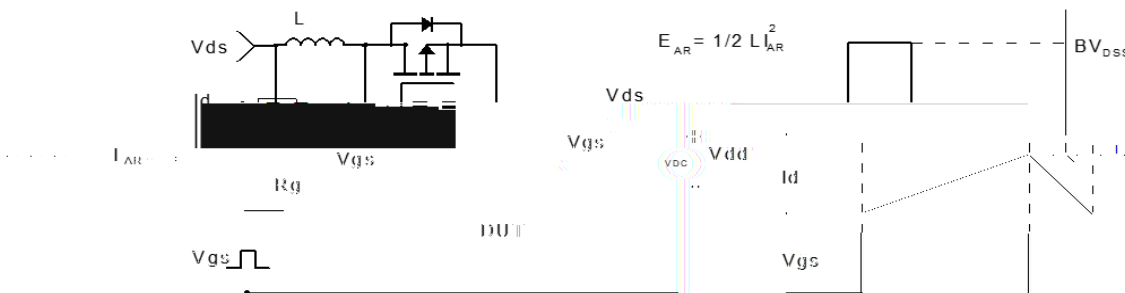


Figure 3: Unclamped Inductive Switching Test Circuit & Waveform


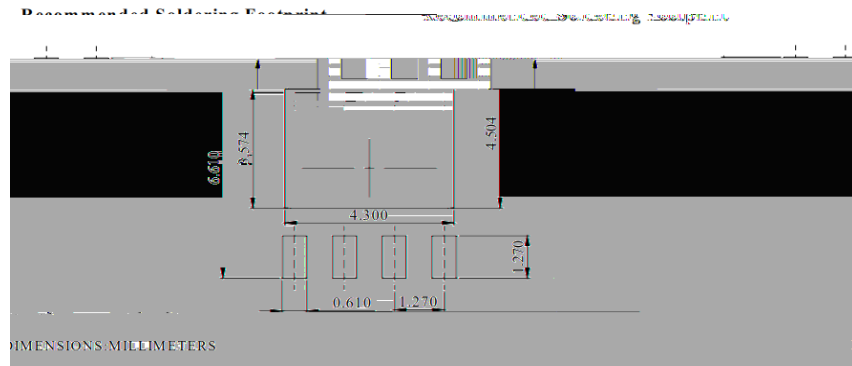


Figure 4: Diode Recovery Test Circuit & Waveform





Package Mechanical Data(PDFN5X6-8L)

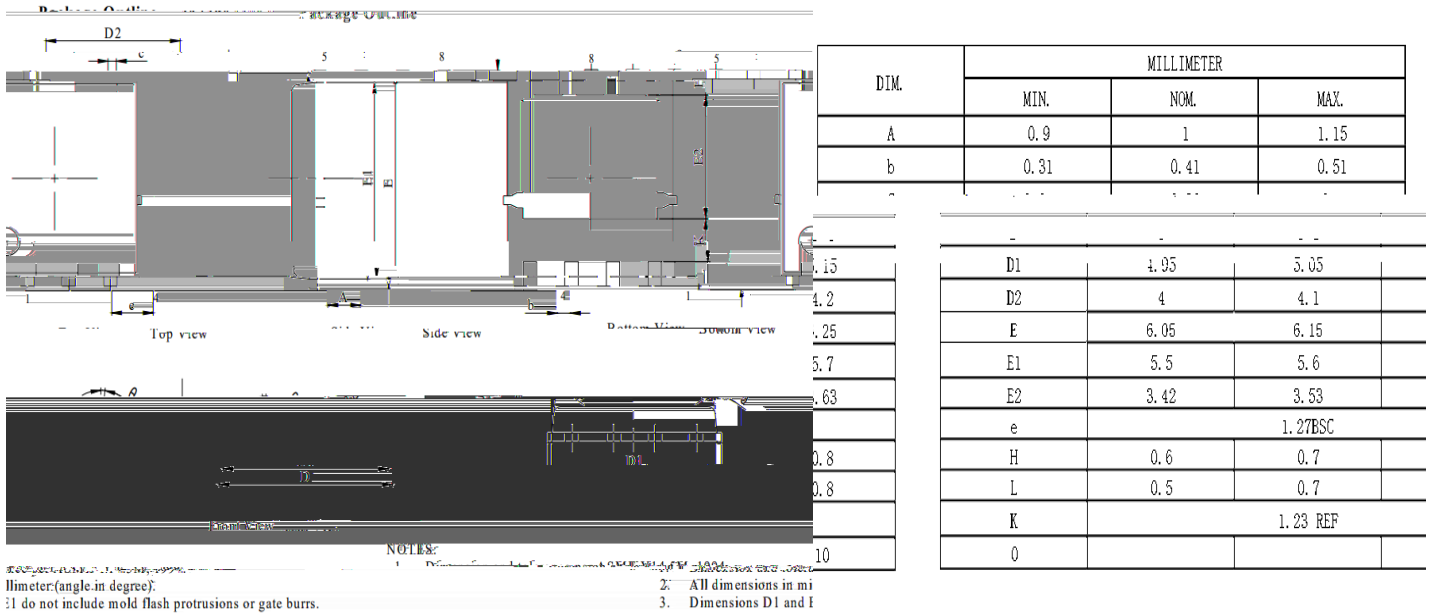

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement. Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

J[®] is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

