

Electrical Characteristics (T_J = 25°C unless otherwise specified)


Symbol	Conditions	Min.	Typ.	Max.	Unit
Off Characteristics					

--	--	--	--	--	--

--	--	--	--	--	--

--	--	--	--	--	--

--	--	--	--	--	--



Typical Performance Characteristics

Figure 1: Power De-rating



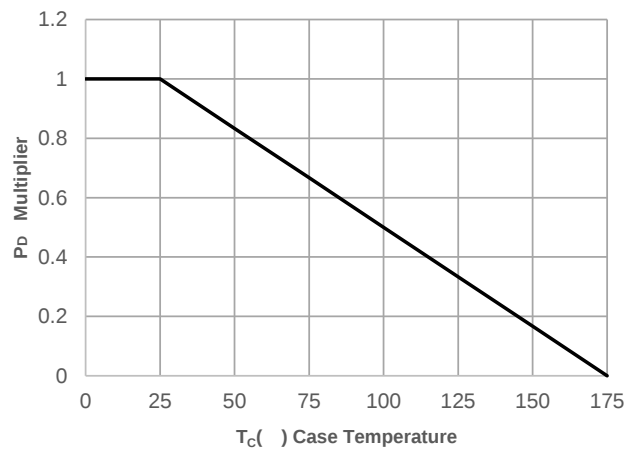


Figure 2: Current De-rating

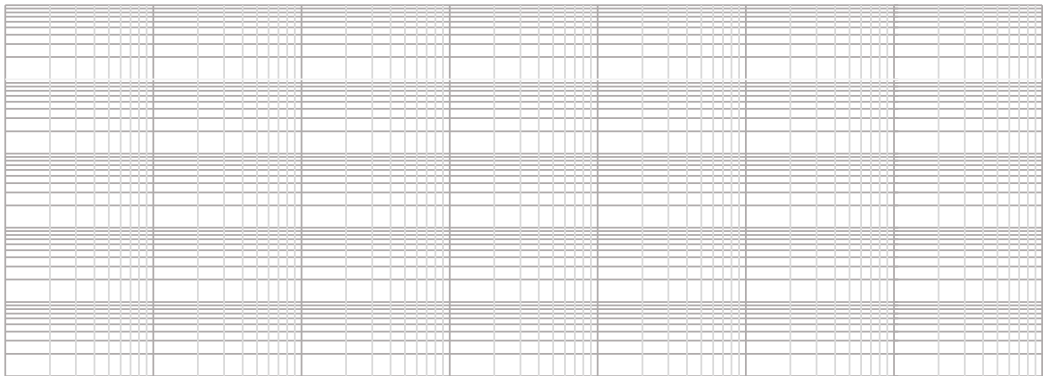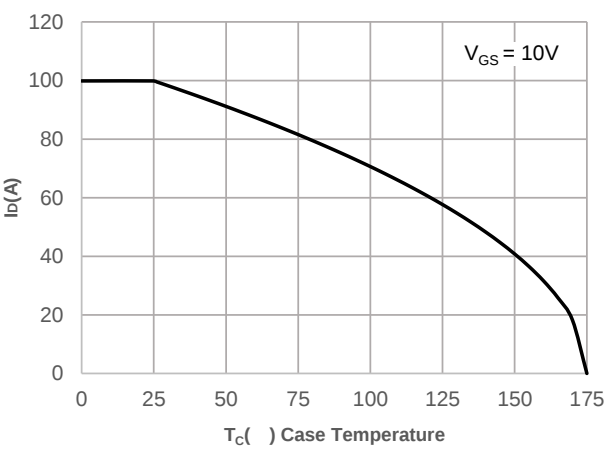

Typical Performance Characteristics

Figure 5: Output Characteristics

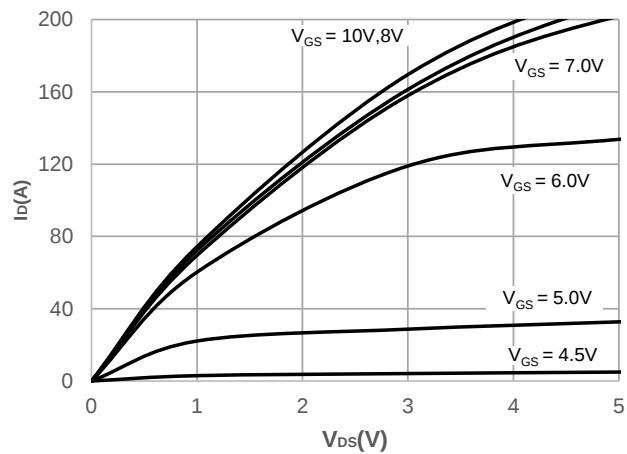


Figure 6: Typical Transfer Characteristics

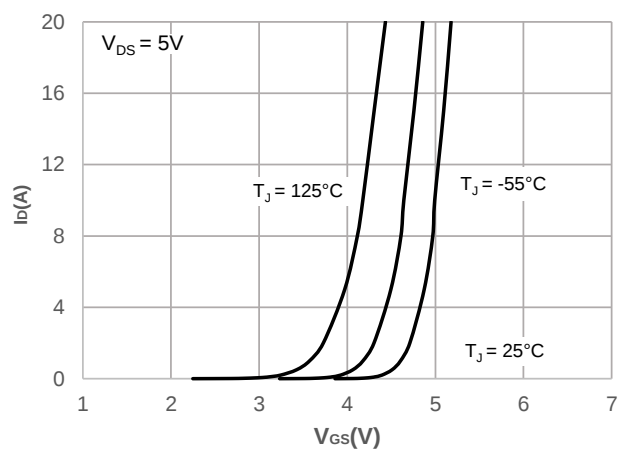


Figure 7: On-resistance vs. Drain Current

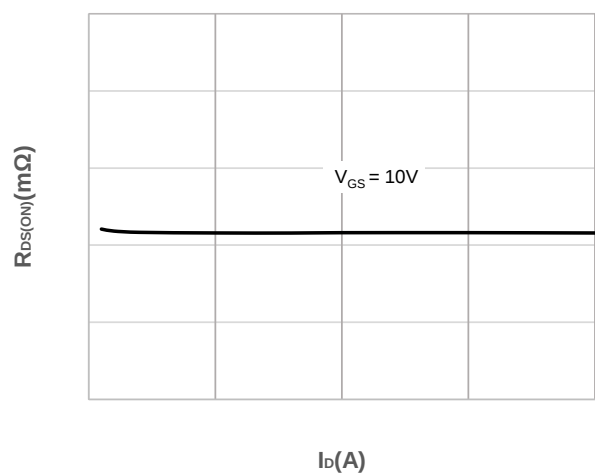


Figure 8: Body Diode Characteristics

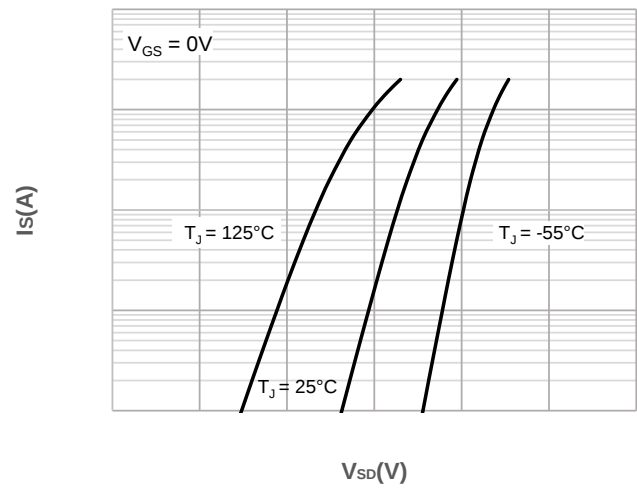


Figure 9: Gate Charge Characteristics


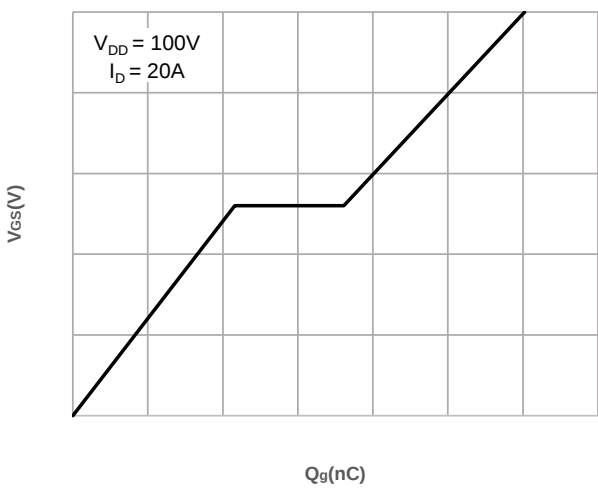


Figure 10: Capacitance Characteristics

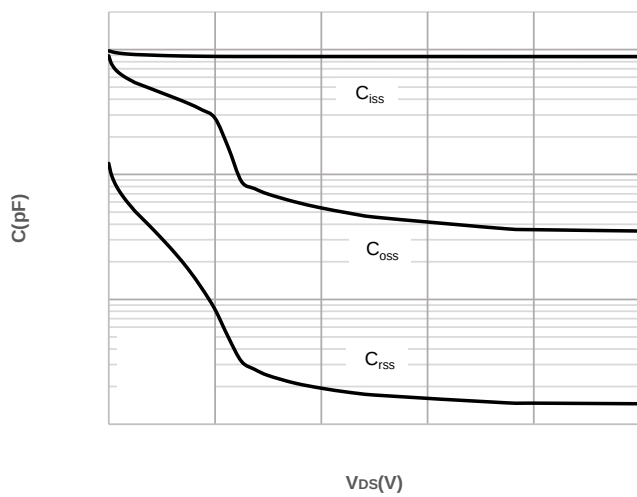

Typical Performance Characteristics

Test Circuit



Figure 1: Gate Charge Test Circuit & Waveform

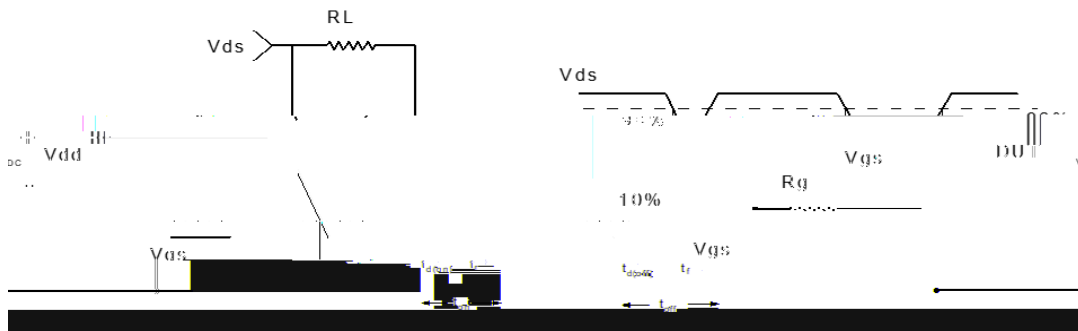


Figure 2: Resistive Switching Test Circuit & Waveform

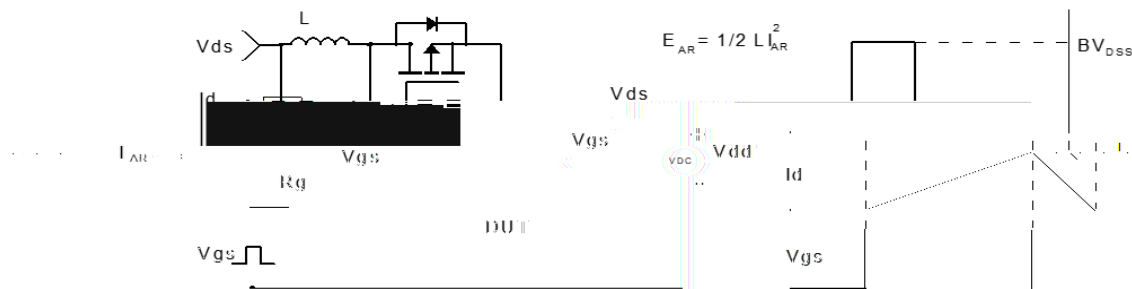


Figure 3: Unclamped Inductive Switching Test Circuit & Waveform

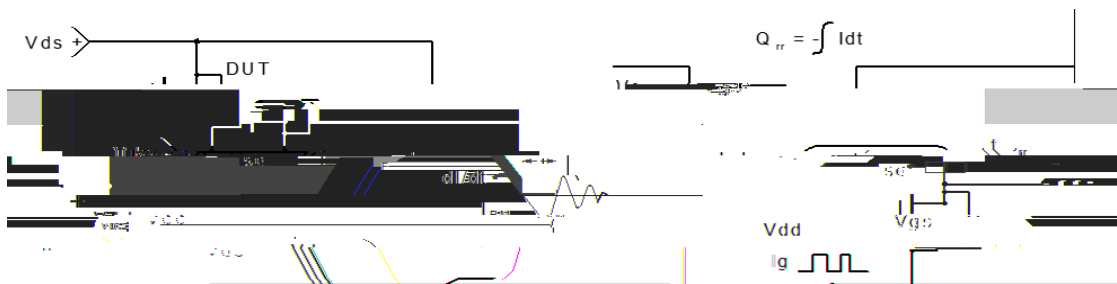


Figure 4: Diode Recovery Test Circuit & Waveform

Package Mechanical Data(TO-220-3L)

Information furnished in this document is believed to be accurate and reliable.
However, Jiangsu