

60V 10mΩ N-Ch Power MOSFET

Product Summary

Parameter	Value	Unit
V_{DS}	60	V
$V_{GS(th_Typ)}$	1.7	V
I_D (@ $V_{GS} = 10V$) ⁽¹⁾	12.7	A
$R_{DS(ON)_Typ}$ (@ $V_{GS} = 10V$)	10	mΩ
$R_{DS(ON)_Typ}$ (@ $V_{GS} = 4.5V$)	13	mΩ

Ordering Information

Device	Package	# of Pins	Marking	MSL	T_J (°C)	Media	Quantity (pcs)
JMSL0615AP-13	SOP-8L	8	SL0615A	3	-55 to 150	13-inch Reel	2500

Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Drain-to-Source Voltage	V_{DS}	60	V
Gate-to-Source Voltage	V_{GS}	±20	V
Continuous Drain Current ⁽¹⁾	I_D	$T_A = 25^\circ\text{C}$	12.7
		$T_A = 70^\circ\text{C}$	10.2
Pulsed Drain Current ⁽²⁾	I_{DM}	51	A
Avalanche Current ⁽³⁾	I_{AS}	20	A
Avalanche Energy ⁽³⁾	E_{AS}	20	mJ
Power Dissipation ⁽⁴⁾	P_D	$T_A = 25^\circ\text{C}$	3.6
		$T_A = 70^\circ\text{C}$	2.3
Junction & Storage Temperature Range	T_J, T_{STG}	-55 to 150	°C

	Symbol	Min.	Typ.	Max.	Unit
t _{ptse]} Å	V _{(BR)DSS}	60			V
	V _{BS} = 48V, V _{GS} = 0V T _J = 55°C				
Gate Threshold Voltage	I _{GSS}			±100	nA
	V _{GS(th)}	1.2	1.7	2.5	V
			10.0	12.5	mΩ
			13.0	16.9	mΩ
		g _{FS}		50	S
		V _{SD}		0.72	1.0
	I _S			3.6	A
	C _{iss}		731		pF
	C _{oss}		224		pF
	C _{rss}		7.4		pF
	R _g		1.7		Ω

SWITCHING PARAMETERS ⁽⁵⁾


Q _g			13.9		nC
Q _g			7.0		nC
Q _{gs}			1.6		nC
Q _{gd}			3.1		nC
t _{D(on)}			3.9		ns
t _r			4.5		ns
t _{D(off)}			16.5		ns
t _f			6.8		ns
t _{rr}			23		ns
Q _{rr}	I _F = 12A, di _F /dt = 100A/μs		8.8		nC

Parameter	Symbol			Unit
Thermal Resistance, Junction-to-Ambient (t = 10s)	R _{θJA}	30	35	°C/W
Thermal Resistance, Junction-to-Ambient (steady state)	R _{θJA}	40	50	°C/W

Notes:

- application board design.
- This single-pulse measurement was taken under T_{J,Max} = 150°C.
- This single-pulse measurement was taken under the following condition [L = 100μH, V_{GS} = 10V, V_{DS}
- The power dissipation P_D is based on T_{J,Max} = 150°C.
- This value is guaranteed by design hence it is not included in the production test.

Typical Electrical & Thermal Characteristics



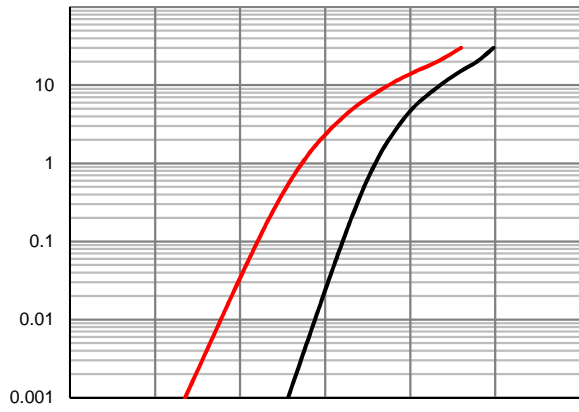


Typical Electrical & Thermal Characteristics



SOP-8L Package Information

Package Outline

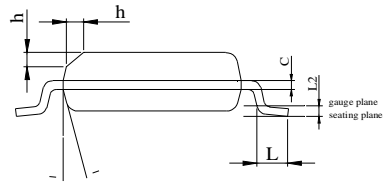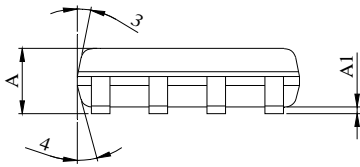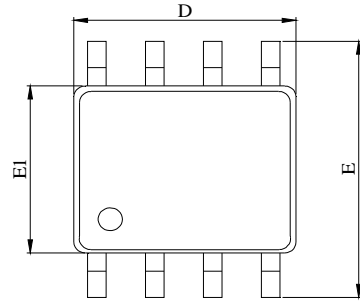

Recommend Soldering Footprint