



JST30F-800CW 30A TRIAC

Rev.A.1.1

The JST30F-800CW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST30F-800CW snubberless triac is especially recommended for use on inductive loads. By using an external plastic package, JST30F-800CW provides a rated insulation voltage of 2000 VRMS, complying with UL standards (File ref: E252906). Package TO-220F is RoHS compliant.

| Parameter | Symbol | Value | Unit |
|--|--------------|---------|------|
| Storage junction temperature range | T_{stg} | -40-150 | |
| Operating junction temperature range | T_j | -40-125 | |
| Repetitive peak off-state voltage ($T_j=25^\circ\text{C}$) | V_{DRM} | 800 | V |
| Repetitive peak reverse voltage ($T_j=25^\circ\text{C}$) | V_{RRM} | 800 | V |
| RMS on-state current ($T_c 071^\circ\text{C}$) | $I_{T(RMS)}$ | 30 | A |
| Non repetitive surge peak on-state current (full cycle, $t_p=20\text{ms}$, $T_j=25^\circ\text{C}$) | I_{TSM} | 300 | A |
| Non repetitive surge peak on-state current (full cycle, $t_p=16.6\text{ms}$, $T_j=25^\circ\text{C}$) | | 330 | |
| I^2t value for fusing ($t_p=10\text{ms}$, $T_j=25^\circ\text{C}$) | I | | |

| | | | |
|--|-------------|-----|----|
| Average gate power dissipation ($T_j=125$) | $P_{G(AV)}$ | 0.5 | W |
| Peak gate power | P_{GM} | 10 | W |
| Peak pulse voltage ($T_j=25$; non-repetitive,off-state;FIG.7) | V_{pp} | 2.5 | kV |

($T_j=25$ unless otherwise specified)

| Symbol | Test Condition | Quadrant | Value | | Unit |
|-------------|---|----------|-------|------|------------|
| I_{GT} | $V_D=12V R_L=33$ | - - | MAX. | 35 | mA |
| V_{GT} | | - - | MAX. | 1.3 | V |
| V_{GD} | $V_D=V_{DRM} T_j=125$ $R_L=3.3k$ | - - | MIN. | 0.15 | V |
| I_L | $I_G=1.2I_{GT}$ | - | MAX. | 70 | mA |
| | | | | 80 | |
| I_H | $I_T=500mA$ | | MAX. | 50 | mA |
| dV/dt | $V_D=540V$ Gate Open $T_j=125$ | | MIN. | 1200 | V/ μs |
| $(dI/dt)_c$ | $(dV/dt)_c=20V/\mu s T_j=125$ | | MIN. | 15 | A/ms |
| t_{on} | $I_G=40mA I_A=200mA I_R=20mA$ $T_j=25$ | | TYP. | 7 | μs |
| t_{off} | | | | 50 | |

| Symbol | Parameter | | Value(MAX.) | Unit |
|-----------|---------------------------|-----------|-------------|---------|
| V_{TM} | $I_{TM}=42A t_p=380\mu s$ | $T_j=25$ | 1.5 | V |
| V_{TO} | Threshold voltage | $T_j=125$ | 0.72 | V |
| R_D | Dynamic resistance | $T_j=125$ | 25 | m |
| I_{DRM} | $V_D=V_{DRM} V_R=V_{RRM}$ | $T_j=25$ | 5 | μA |

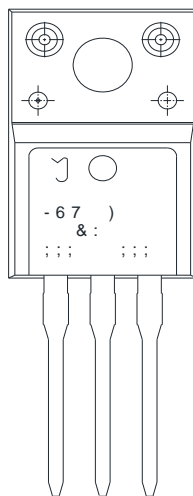
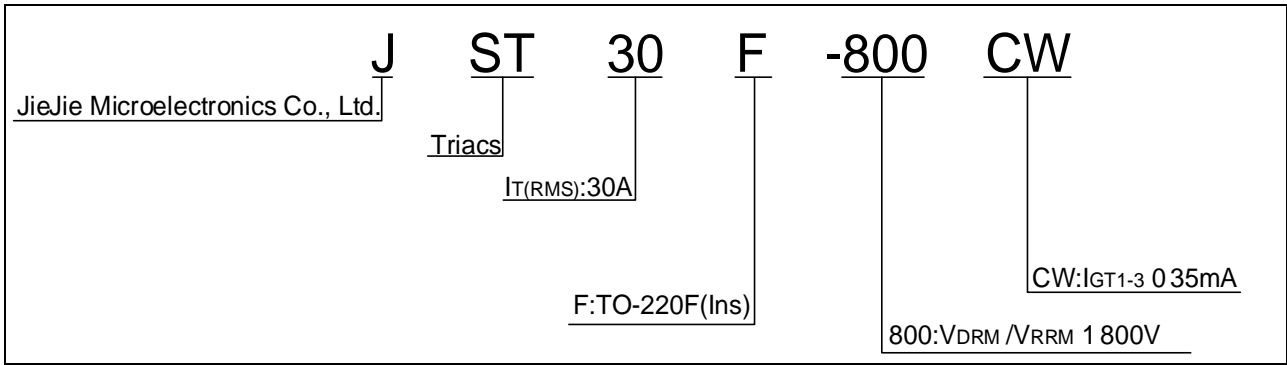


FIG.1: Maximum power dissipation versus RMS on-state current


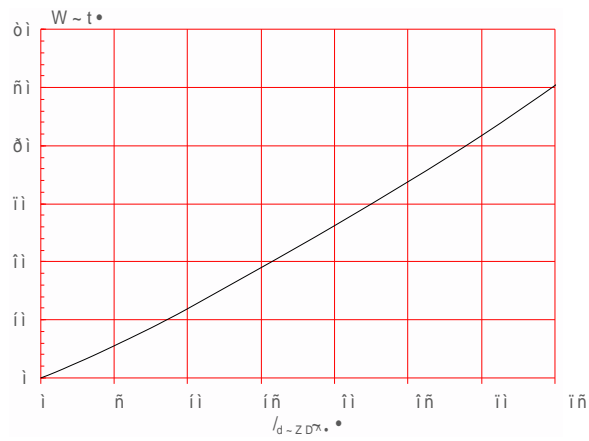


FIG.2: RMS on-state current versus case temperature



FIG.7 ÖTest circuit for inductive and resistive loads to IEC-61000-4-5 standards

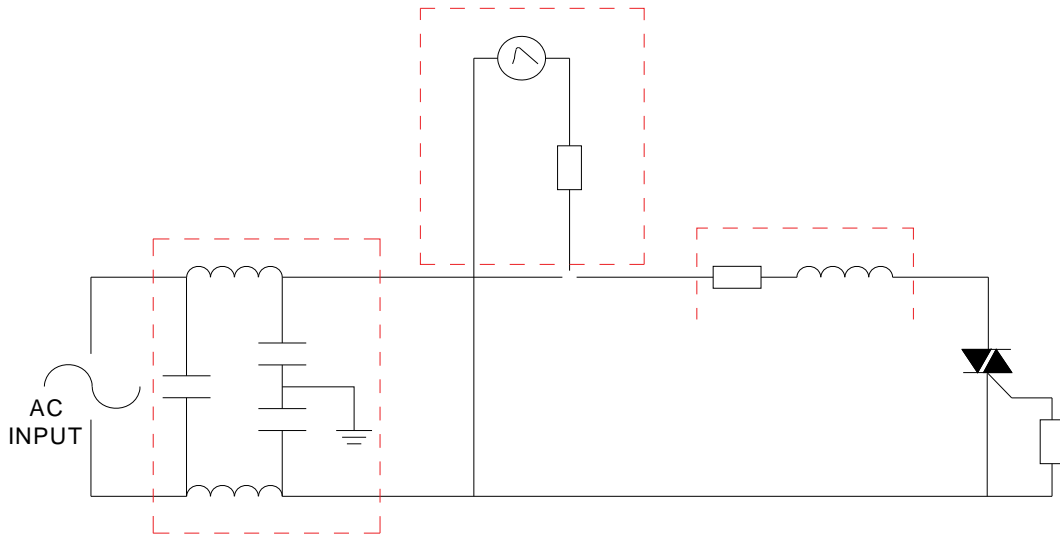

| Order code | Voltage V _{DRM} /V _{RRM} (V) | IGT(mA) | Package | Base qty. (pcs) | Delivery |
|------------|---|---------|---------|--------------------|----------|
|------------|---|---------|---------|--------------------|----------|



