


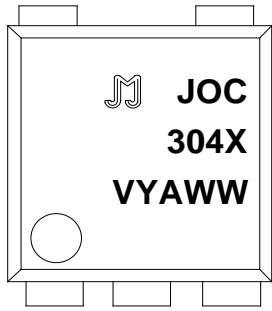

**JOC304X**

ORDERING AND MARKING INFORMATION

MARKING INFORMATION	
	JOC : Company Abbr. 304X: Part Number & Pak VYAWW : LOT NO.
ORDERING INFORMATION	
JOC304XD5(Y)(Z)-GV JOG- Company Abbr.	

Characteristics Curves

**FIG.1:** Forward Current vs. Ambient Temperature



**FIG.2:** On-state Terminal Current vs. Ambient Temperature

**JOC304XD5**

**TEST CIRCUITS**

**FIG.12:** Test Circuits of Turn On Time


**FIG.13:** Waveforms of Turn On Time

Package Dimension (Unit:mm)


Option S Type:



Option SLM Type:



Option SL

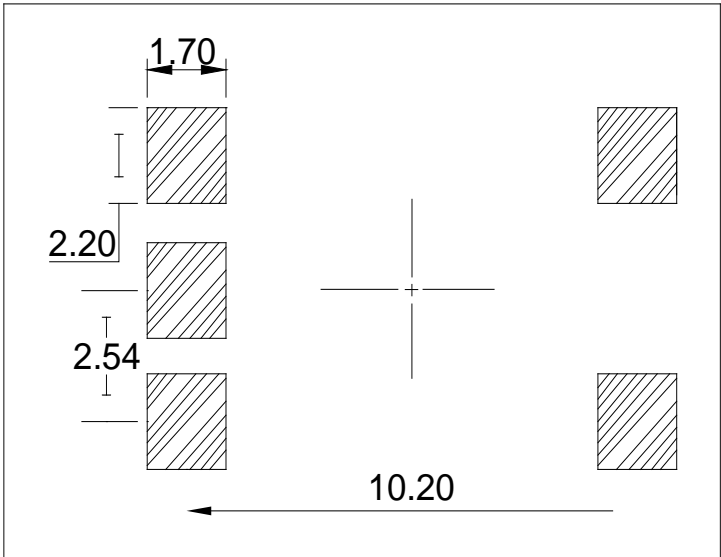


Option SLM




TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

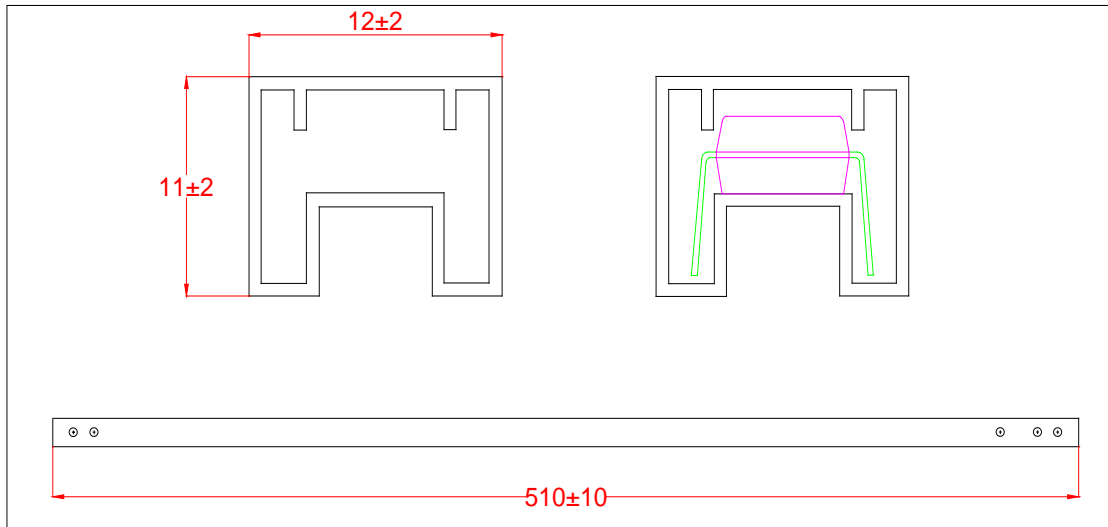


Option M

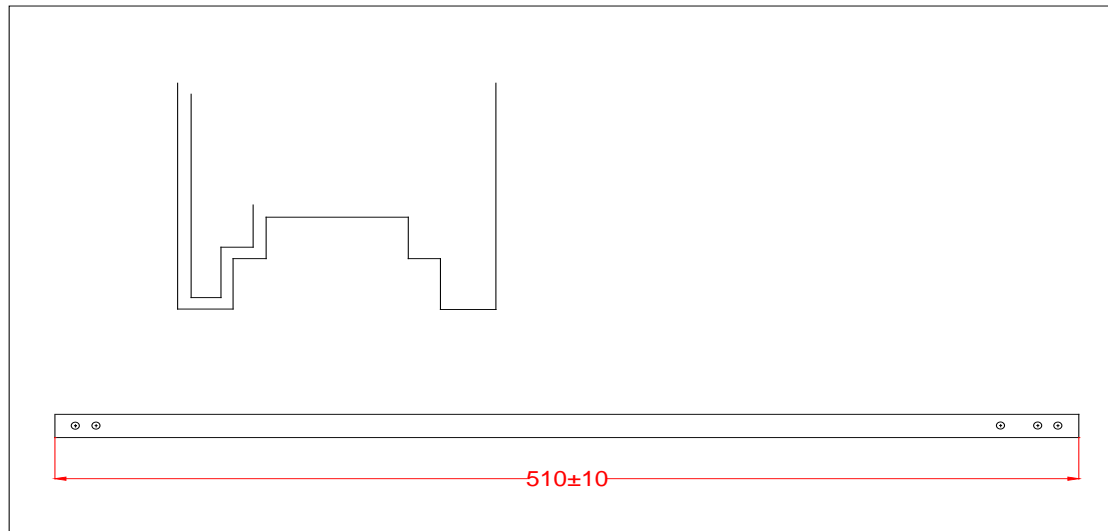

CARRIER TAPE SPECIFICATIONS (



WAVE SOLDERING

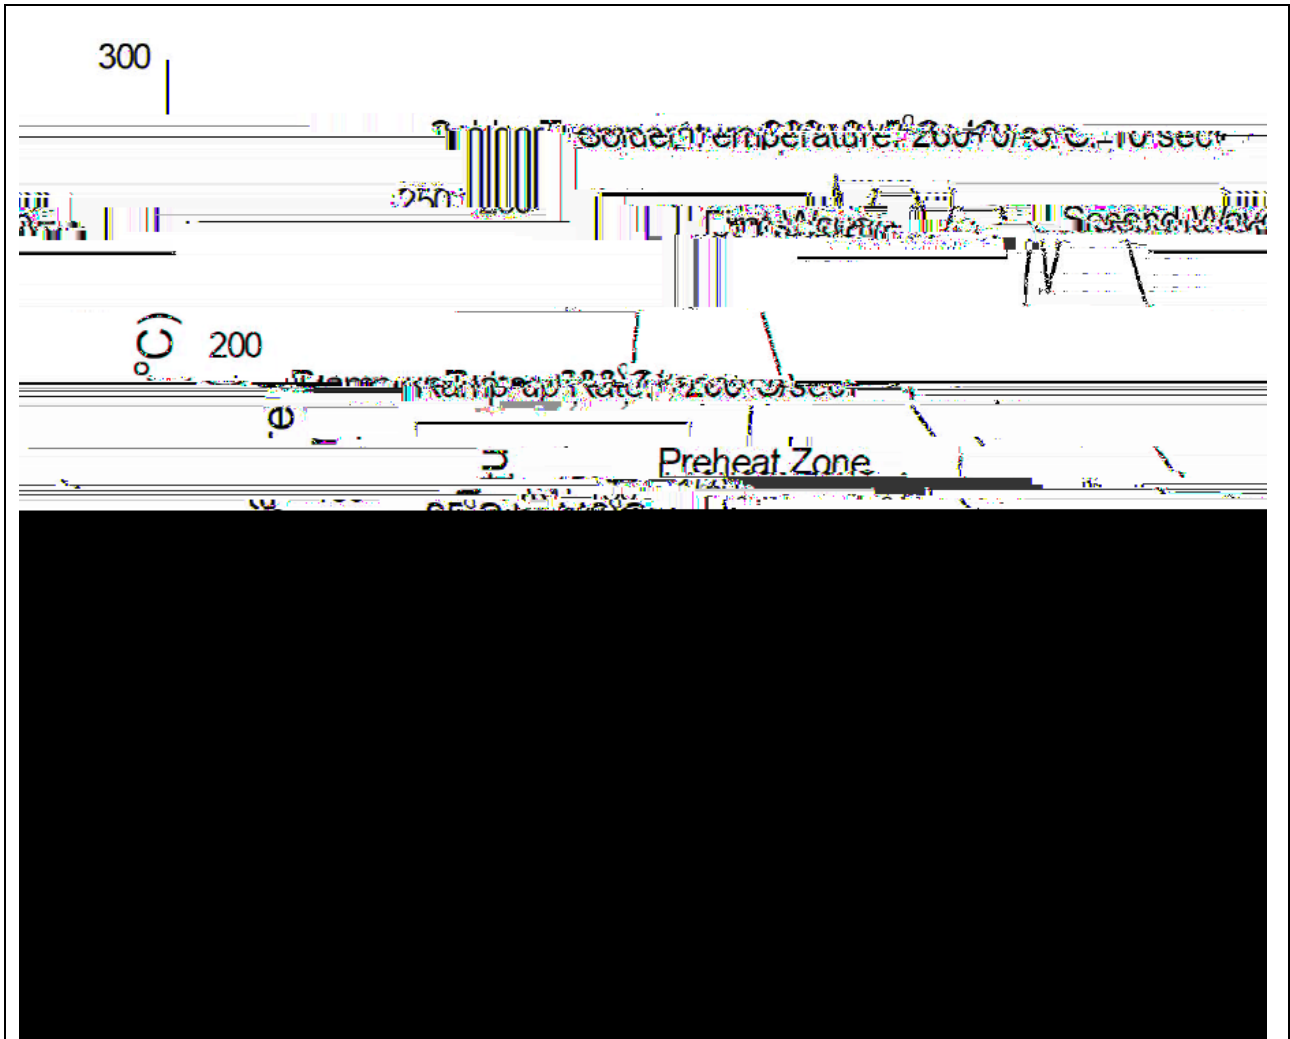

HAND SOLDERING BY SOLDERING IRON

Soldering Temperature	360 ± 5
Soldering Time	3s max.

## Document Revision History

Date	Revision	Changes
Apr.2, 2025	A.1.0	Last update
Nov.6, 2025	A.1.1	Add S&SLM package

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.