




DESCRIPTION:

MAIN FEATURES


to 110

REACH & RoHS compliance


HBM: H3A; MM: M4



JOCSZX1X-D6P



JOCSZX1X-D6S



ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol		Value	Unit

NOTE1: 100 μ s pulse, 100Hz frequency **NOTE2:** AC for 1minute, R.H.=40~60%

ELECTRICAL CHARACTERISTICS

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit

NOTE3: Test voltage must be applied within dV/dt ratings. **NOTE4:** Refer to Fig.14 & Fig.15

Ambient Temperature

Temperature

FIG.7:


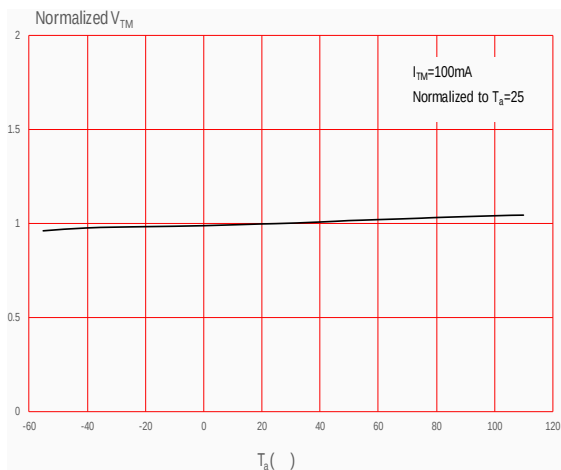


FIG.8:

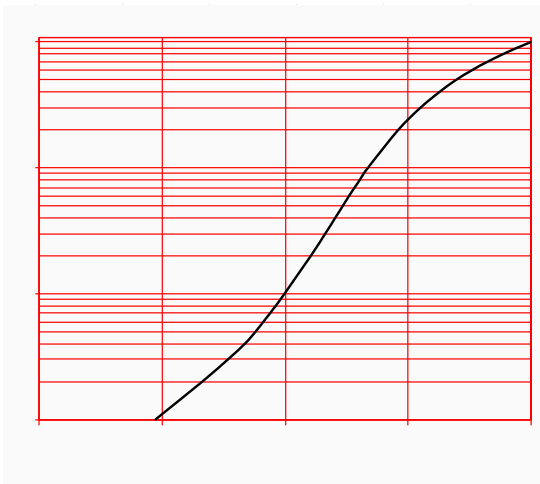

TEST CIRCUITS

FIG.12:

FIG.13:

Fig.14: Test Circuits of dV/dt



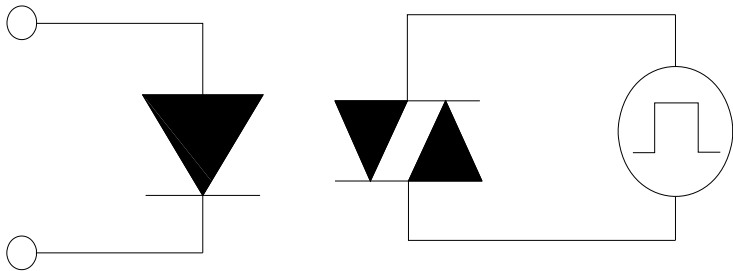


Fig.15: Waveforms of dV/dt

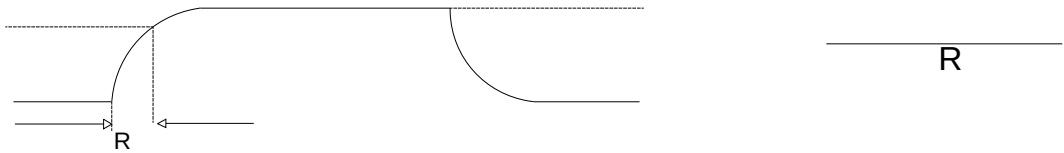


[illegible]


Standard DIP

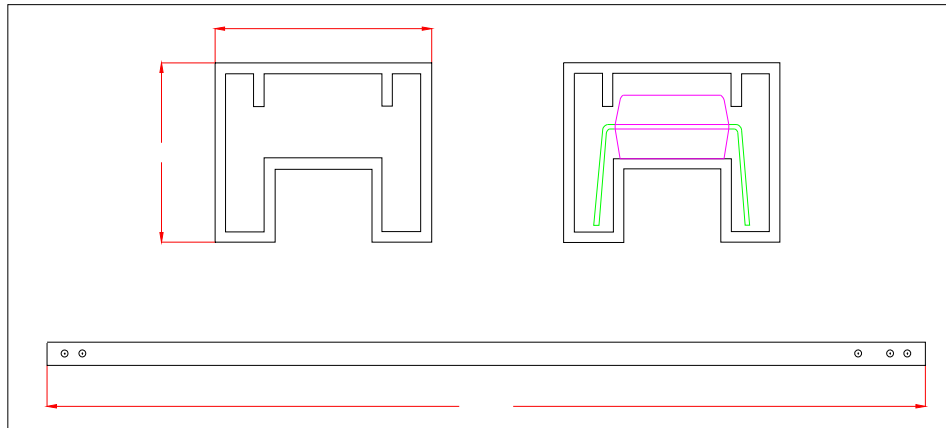


Option S/L

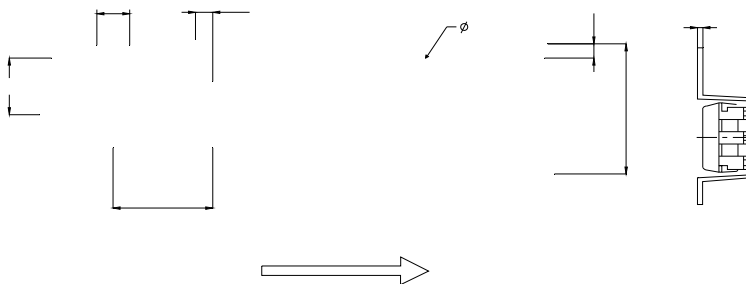[illegible]

REFLOW INFORMATION

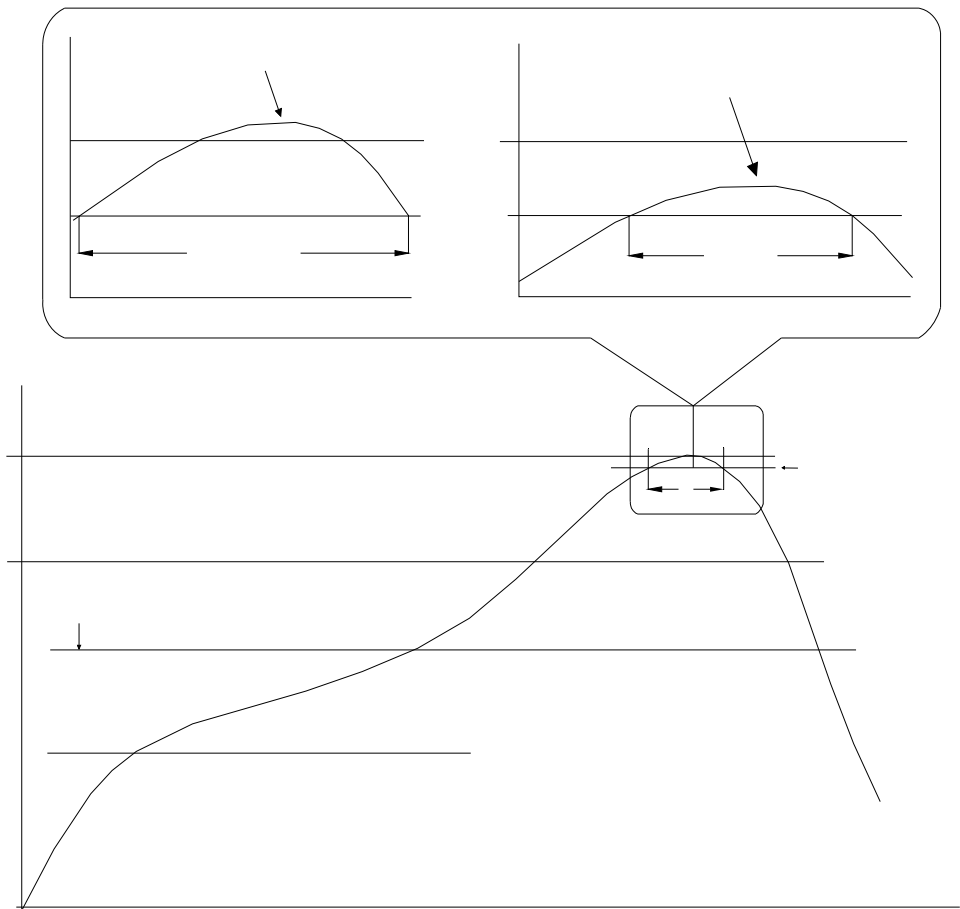

WAVE SOLDERING

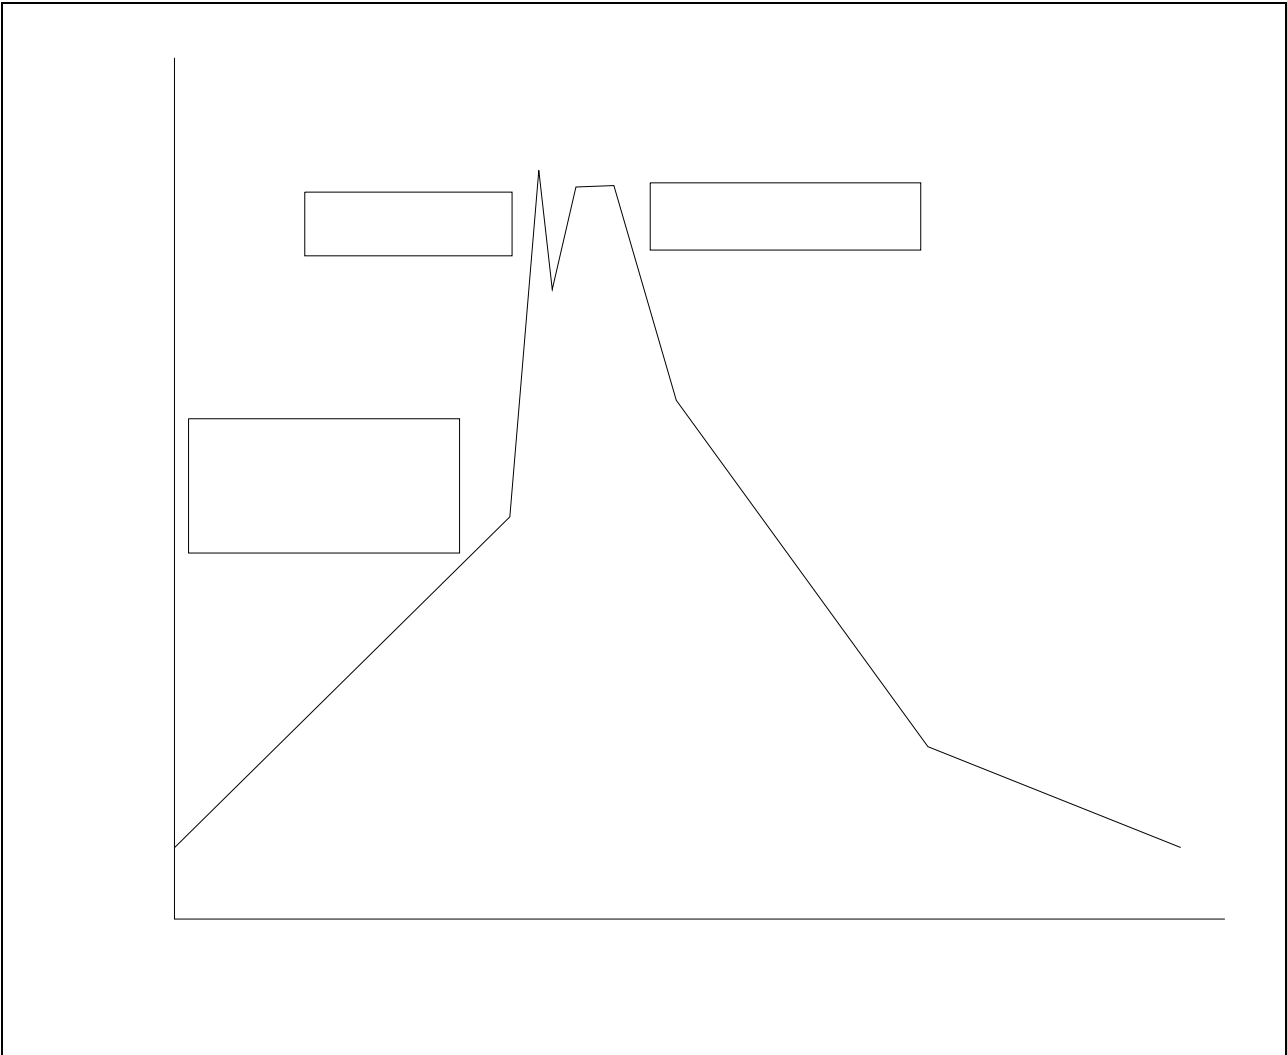

HAND SOLDERING BY SOLDERING IRON	
	±

