

U

EU

EMLD .

P_{Dmax}	P_D	20	W
$V_{GS}(j=25^\circ C; R_{DS(on)}=8\Omega)$	V_{GS}	0.5	V

ELECTRICAL CHARACTERISTICS

Symbol	Condition	At $T_j=25^\circ C$			Unit
		I_D	V_{GS}	$R_{DS(on)}$	
I_{DSS}	$V_D=12V, R_L=33\Omega$	-	-	20	A
V_{GS}		-	-	1	V
V_{DS}	$V_D=V_{GS}, T_j=125^\circ C, R_L=3.3k\Omega$	0.2	-	-	V
I_L	$I_G=1.2I_{DSS}$	-	-	70	A
I_H	$I_T=500mA$	-	-	60	A
V_{DS}	$V_D=540V, T_j=125^\circ C$	1000	-	-	V
t_{on}	$I_G=20A, I_A=200A, I_R=20A$	-	2	-	s
t_{off}	$T_j=25^\circ C$	-	50	-	

STATIC CHARACTERISTICS

Symbol	Condition	At $T_j=25^\circ C$	Unit
V_{DS}	$I_D=50A, t_p=380\mu s$	1.5	V
V_{DS}		1	V
$R_{DS(on)}$		9.3	Ω
I_{DS}	$V_D=V_{DS}, V_R=V_{RRM}$	5	A
I_{DS}		0.7	A

THERMAL RESISTANCES

Symbol	Condition	Unit	Unit
R_{th}	$48W, 89W, 100W$	$^\circ C/W$	

C825E



Ma

Co , tl

FI : 111
11 -11

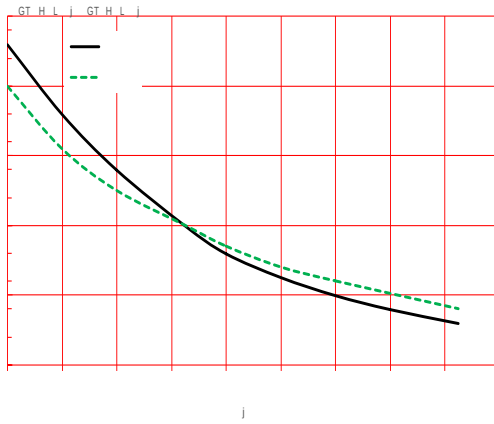
G

.1

FI 11 -11
11

.2:

FI 0.7: G

p
p
p

C825E

0 0 M

