

0

Td (


Average gate power dissipation ($T_j=150$)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	10	W
Peak pulse voltage ($T_j=25$; non-repetitive, off-state; FIG.7)	V_{pp}	3	kV

ELECTRICAL CHARACTERISTICS (unless otherwise specified)


Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	$V_D=12V$ $R_L=33$	- -	MAX.	20	mA
V_{GT}		- -	MAX	1	V
V_{GD}	$V_D=V_{DRM}$ $T_j=150$ $R_L=3.3k$	- -	MIN.	0.2	V
I_L	$I_G=1.2I_{GT}$	-	MAX.	40	mA
				55	

I_{Hc2} (.2) T_J 0 T_c 3 T_w 1.11 0 T_d () T_j EMC /P <</84ID 67 >>BDC 2/C2_1 A

ORDERING INFORMATION

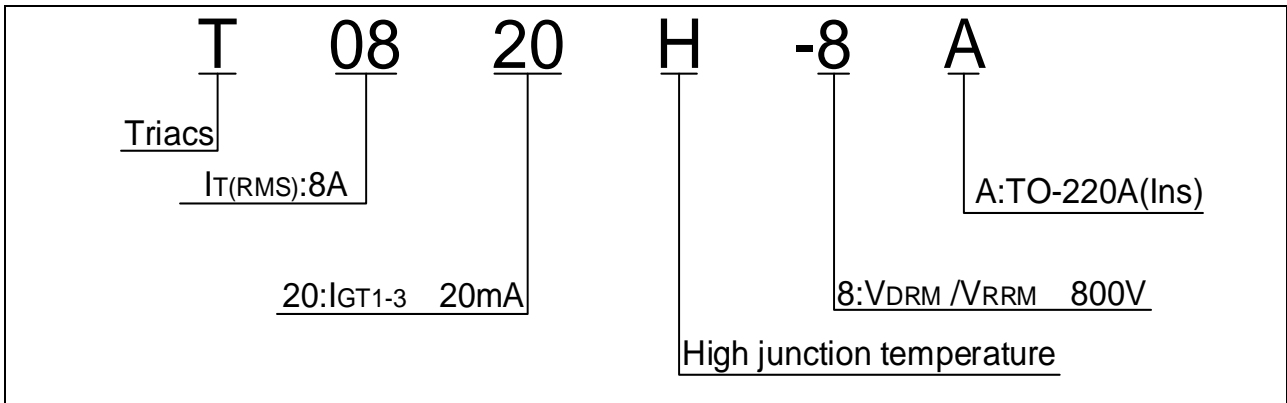

MARKING

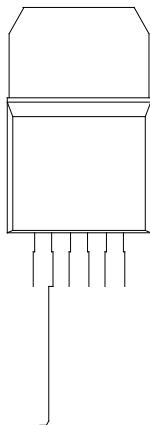

T0820H-8A

JieJie M 0 Td (88 797 Tf)E4 Tw 5.04icroele

PACKAGE MECHANICAL DATA

