

6A TRIAC

Rev.A.1.1

6A TRIAC is suitable for general purpose AC
It can be used as an ON/OFF function in
such as heating regulation, induction motor
for phase control operation in light dimmers,
fans controllers. Compared to traditional triacs,
6A TRIAC has a very high switching capability up to
temperatures of 150°C. By using an external plastic
package 6F provides a rated insulation voltage of
600V complying with UL standards (File ref: E252906).
6A TRIAC is RoHS compliant.

Parameter	Symbol	Value	Unit
Storage junction temperature range	T _{stg}	-40-150	
Operating junction temperature range	T _j	-40-150	
Repetitive peak off-state voltage (T _j =25℃)	V _{DRM}	600	V
Repetitive peak reverse voltage (T _j =25℃)	V _{RRM}	600	V
RMS on-state current (T _c 106℃)	I _{T(RMS)}	12	A
Non repetitive surge peak on-state current (full cycle , t _p =20ms , T _j =25℃)	I _{TSM}	120	A
Non repetitive surge peak on-state current (full cycle , t _p =16.6ms , T _j =25℃)		132	

12

Average gate power dissipation ($T_j=150\text{ }^{\circ}\text{C}$)	$P_{G(AV)}$	1	W
Peak gate power	P_{GM}	10	W
Peak pulse voltage ($T_j=25\text{ }^{\circ}\text{C}$; non-repetitive,off-state;FIG.7)	V_{pp}	4.5	kV

($T_j=25\text{ }^{\circ}\text{C}$ unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I_{GT}	$V_D=12V\ R_L=33\Omega$	- -	MAX.	35	mA
V_{GT}		- -	MAX.	1	V
V_{GD}	$V_D=V_{DRM}\ T_j=150\text{ }^{\circ}\text{C}$ $R_L=3.3k\Omega$	- -	MIN.	0.2	V

FIG.1: Maximum power dissipation versus RMS on-state current

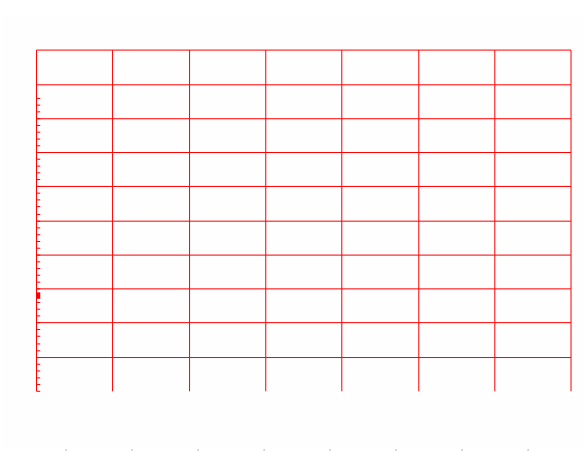


FIG.2: RMS on-state current versus case temperature

FIG.7 Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
T1235H-6F	600	35	TO-220F(Ins)	50	Tube

Document Revision History

Date	Revision
------	----------



/

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.