



JST137C-600EX 8A TRIAC

Rev.A.1.1


DESCRIPTION:

The JST137 C-600EX is a high speed triac with a high surge capability. It can be used as ON/OFF switch in AC circuits. It is suitable for switching inductive loads. The maximum surge current is 8A. The maximum average current is 1.5A. The maximum power dissipation is 0.5W. The maximum operating temperature is 125°C. The package is TO-220C.


MAIN FEATURES

JST137C-600EX

ORDERING INFORMATION

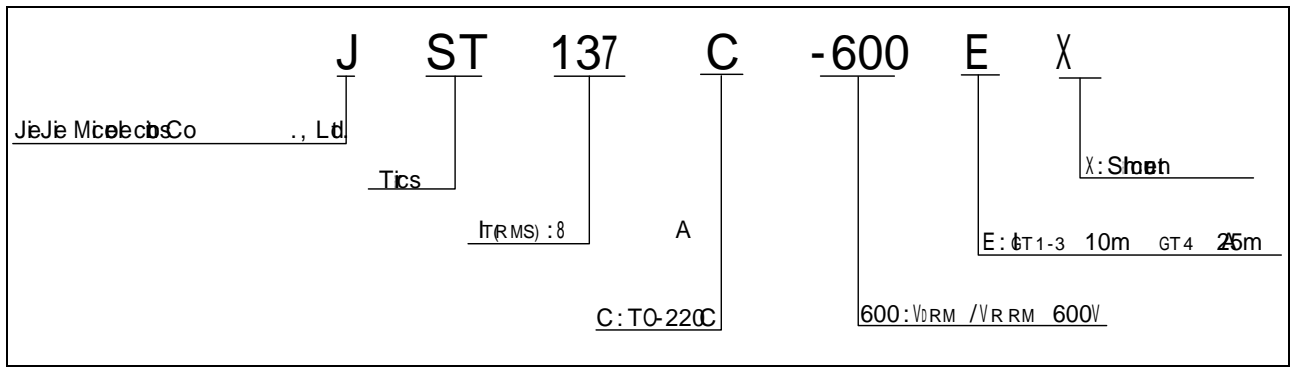

MARKING

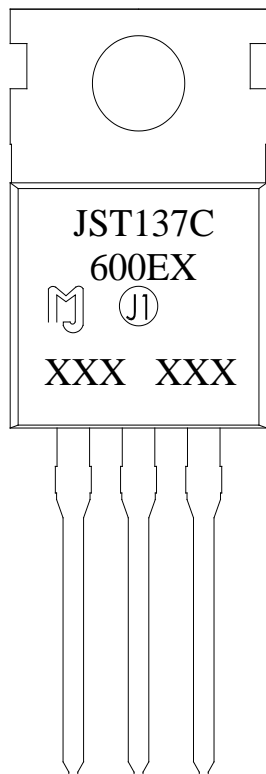


ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)		Package	Base qty. (pcs)	Delivery mode
		-	-			
JST137C-600EX	600	10	25	TO-220C	50	Tube

Document Revision History

Date	Rev	Chges
.14.2023	p 1.0 A	Updated
Oct 16, 2025	1.1 A	Rev P MECH CK A A NIC

PACKAGE MECHANICAL DATA C2C3CGL2A



Information provided in this document is the property of JieJie Microelectronics Co., Ltd. and is confidential. It is intended for the use of the recipient only. If you have received this document in error, please notify the sender immediately. JieJie Microelectronics Co., Ltd. reserves the right to change the specifications without notice. © 2014 JieJie Microelectronics Co., Ltd. All rights reserved.