


DESCRIPTION:

The JST139E-600F triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. Package TO-263 is RoHS compliant.

MAIN FEATURES

Symbol	Value	Unit
$I_{T(RMS)}$	16	A
V_{DRM}/V_{RRM}	600	V
$I_{GT} / / /$	25/25/25/70	mA

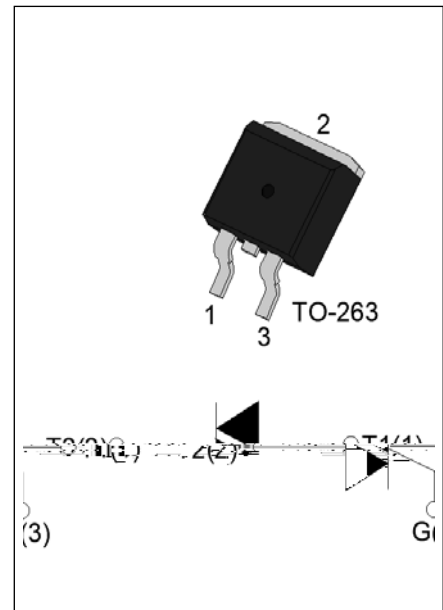

ABSOLUTE MAXIMUM RATINGS

Parameter		Symbol	Value	Unit
Storage junction temperature range		T _{stg}	-40-150	
Operating junction temperature range		T _j	-40-125	
Repetitive peak off-state voltage (T _j =25)		V _{DRM}	600	V
Repetitive peak reverse voltage (T _j =25)		V _{RRM}	600	V
RMS on-state current (T _C ≤ 95)		I _{T(RMS)}	16	A
Non repetitive surge peak on-state current (full cycle , t _p =20ms , T _j =25)		I _{TSM}	140	A
Non repetitive surge peak on-state current (full cycle , t _p =16.6ms , T _j =25)			154	
I ² t value for fusing (t _p =10ms , T _j =25)		I ² t	98	A ² s
Critical rate of rise of on-state current (I _G =2×I _{GT} , f=100Hz , T _j =125)	-	di/dt	100	A s
	-		70	
Peak gate current (t _p =20 s , T _j =125)		I _{GM}	4	A
Average gate power dissipation (T _j =125)		P _{G(AV)}	0.5	W
Peak gate power		P _{GM}	10	W
Peak pulse voltage (T _j =25 ; non-repetitive,off-state;FIG.8)		V _{pp}	1	kV

ELECTRICAL CHARACTERISTICS (unless otherwise specified)

Symbol	Test Condition	Quadrant	Value		Unit
I _{GT}	V _D =12V R _L =33	- -	MAX.	25	mA
				70	

JST139-600

ORDERING IN

JieJie Microelectronics

MARKI

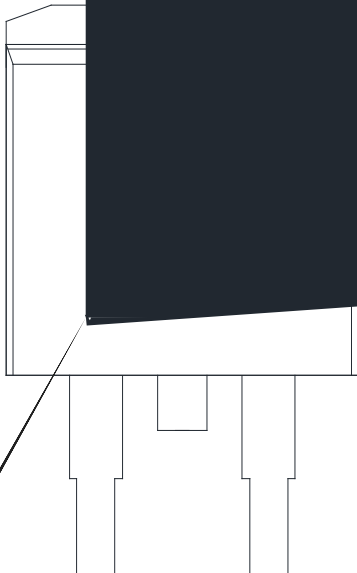


FIG.7: Relative variations of gate trigger current, holding current and latching current versus junction temperature


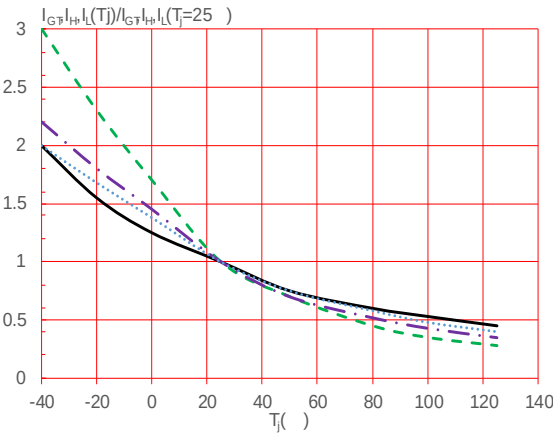


FIG.8: Test circuit for inductive and resistive loads to IEC-61000-4-5 standards



JST139E-600F

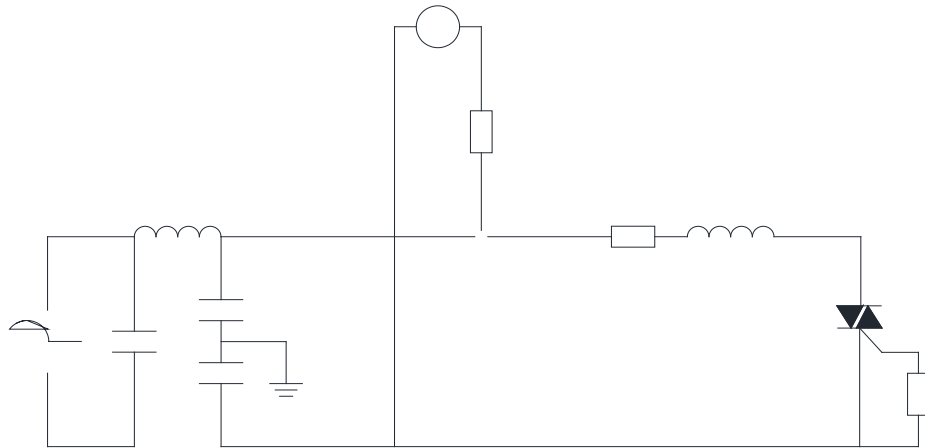