



JST16F-600BW 16A TRIAC

Rev.A.1.1

DESCRIPTION:

The JST16F-600BW triac is suitable for general purpose AC switching. It can be used as an ON/OFF function in applications such as heating regulation, induction motor starting circuits, for phase control operation in light dimmers, motor speed controllers. JST16F-600BW snubberless triac is especially recommended for use on inductive loads. By using an external plastic package, JST16F-600BW provides a rated insulation voltage of 2000 VRMS, complying with UL standards (File ref: E252906). Package TO-220F is RoHS compliant.

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS



Parameter	Symbol	Value	Unit
Storage junction temperature range	T_{stg}	-40-150	
Operating junction temperature range	T_j	-40-125	

Peak gate power	P_{GM}	10	W
Peak pulse voltage ($T_j=25$			


ORDERING INFORMATION

J	ST	16	F	-600	BW
JieJie Microelectronics Co., Ltd.	Triacs	IT(RMS):16A	F:TO-220F(Ins)	600:VDRM /VRRM 1 600V	BW:IGT1-3 0.50mA

MARKING

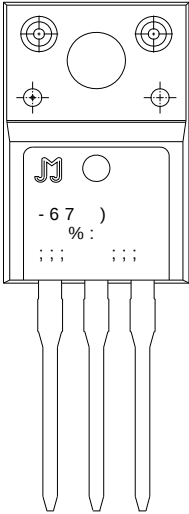	
---	--

Maximum power dissipation versus RMS current

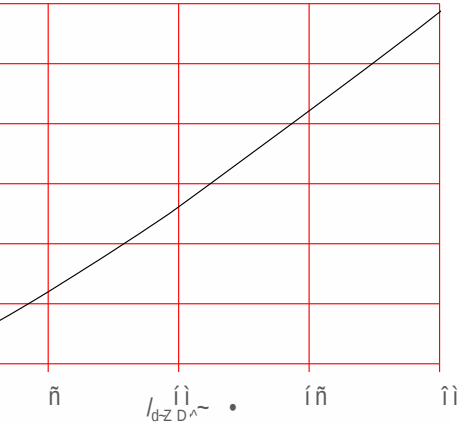

Large peak on-state current versus frequency



FIG.2: RMS on-state current versus case temperature


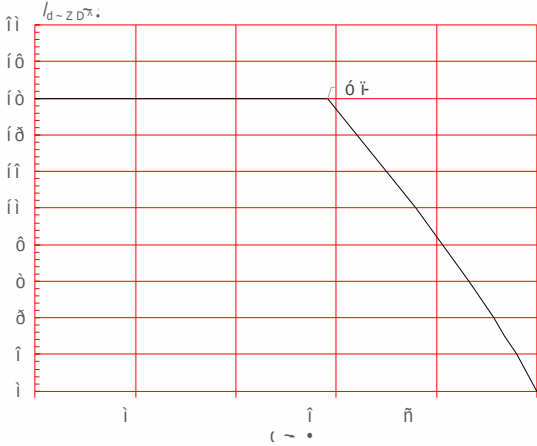


FIG.4: On-state characteristics

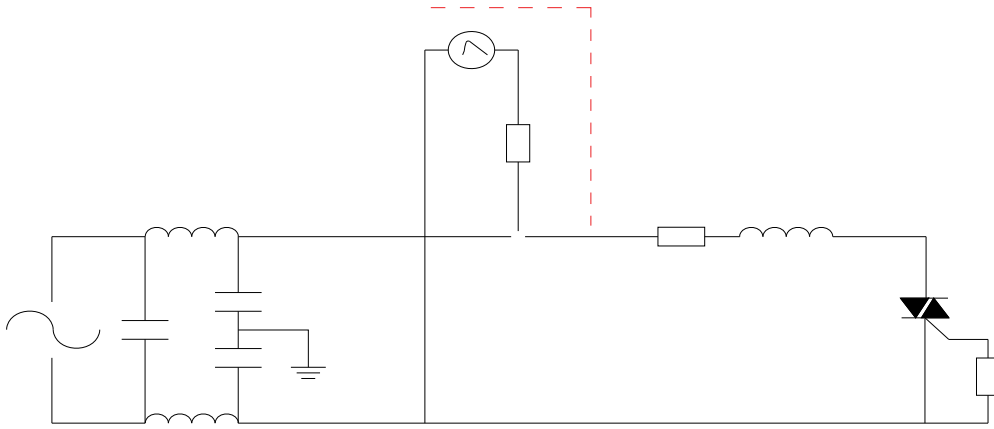

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
------------	---	---------	---------	--------------------	------------------

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2025 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.