



JST41SJ-800BW 40A TRIAC

Rev.A.2.1

DESCRIPTION:

The JST41SJ-800BW is a

AC

applied

to

dim

e

s

JST41SJ-800BW

to

to

to

e

s

to

e

-247J

MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter

Symbol

Value

JST41SJ-800BW

ORDERING INFORMATION

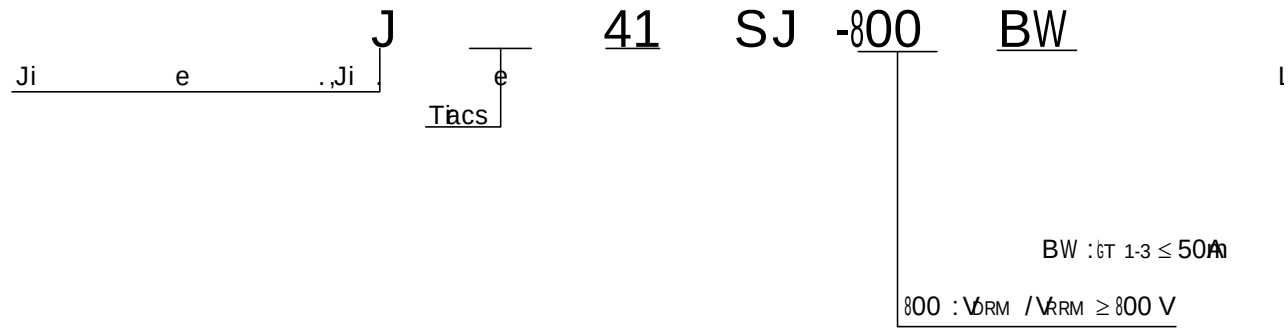


FIG.1: Main

0 10 20 30 40 50 60 70


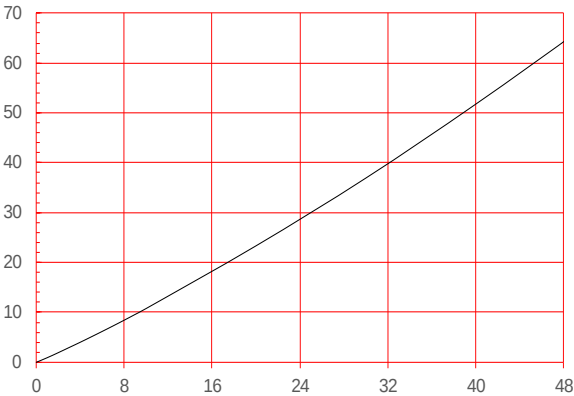


FIG.2: RMS -10 0 10 20 30 40 50 60 70 80 90 100

ORDERING INFORMATION

Order code

PACKAGE MECHANICAL DATA

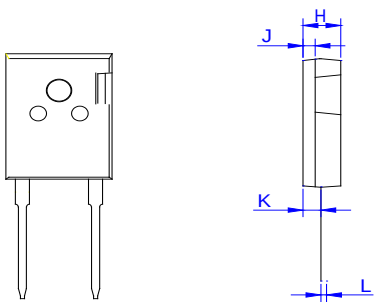

R	Dim			e		B
	eMm		. e	th		
	Min	Typ	Max	Min	Typ	Max
A	15.50		16.10	0.610		0.634
B1	3.10		3.50	0.122		0.138
C	19.70		20.30	0.776		0.799
D	2.90		3.30	0.114		0.130
E	1.90		2.30	0.075		0.091
F	1.00		1.40	0.039		0.055
G		5.44			0.214	
H	4.80		5.20	0.189		0.205
J	1.90		2.10	0.075		0.083
K	2.20		2.50	0.087		0.098
L	0.41		0.79	0.016		0.031

